







MontiM.Test. MontiPower stands for the global impact of the new Monti

in all the countries and areas we are present.



### THE CLEANTECH PREPPER

for field joint preparation onshore and offshore







#### KEY FEATURE COMPARISON


TECHNOLOGY	Sandblasting	Manual Handtool
Mode of operation	Manual	Manual
Cleaning impact	High	Low
Cleaning speed	Fast	Slow
Consumables & Waste	High	High
Reliability/Anchor		
profile precision	High	Medium
EHS (dust free)	No	No
Cost to operate	Medium	Medium
Power requirements	High	Low
Equipment footprint	Large	Small
PPE/HSA impact	High	High

Cleantech Prepper

Automated High High Low

> High Yes

Low Low Small Low

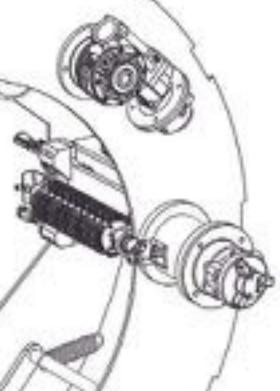





## 83

Corrosion is often an electrochemical reaction whereby oxygen
and water cause iron to rust or copper to
turn green. Corrosion causes enormous
economic damage -approximately 4% of
GNP. Areas that are affected by corrosion must be treated or replaced, and for
transport pipes this can quickly run costs
up into the hundreds of thousands of
Euros. Corrosion also presents enormous
risks because pipes carrying gas or other
hazardous materials can break at areas
weakened by corrosion.

### INADEQUATE SURFACE PREPARATION

The solution for corrosion consists of removing one or more of the three primary causes of corrosion - water, oxygen or the eletrochemical reaction. Traditional coatings for metals, such as bitumen, polyethylene (PE), polypropylene (PP) and epoxy powder coating (FBE), cannot prevent water and/or oxygen from reaching the metal. Transport pipelines often use cathodic protection to stop the electrochemical reaction, whreby an electric current stops the ionization of the iron. All of this requires constant monitoring of the coating protection and its performance. Optimal surface protection is a critical factor in enhancing the performance of protective coatings. That is why rust and corrosion require the best surface preparation possible!


# REASONS FOR COATING FAILURE

1% DEFECTIVE COATING MATERIALS

11% APPLICATION ERRORS

6% POOR SPECIFICATION COATING SELECTION

5% ENVIRONMENTAL CONTROLS

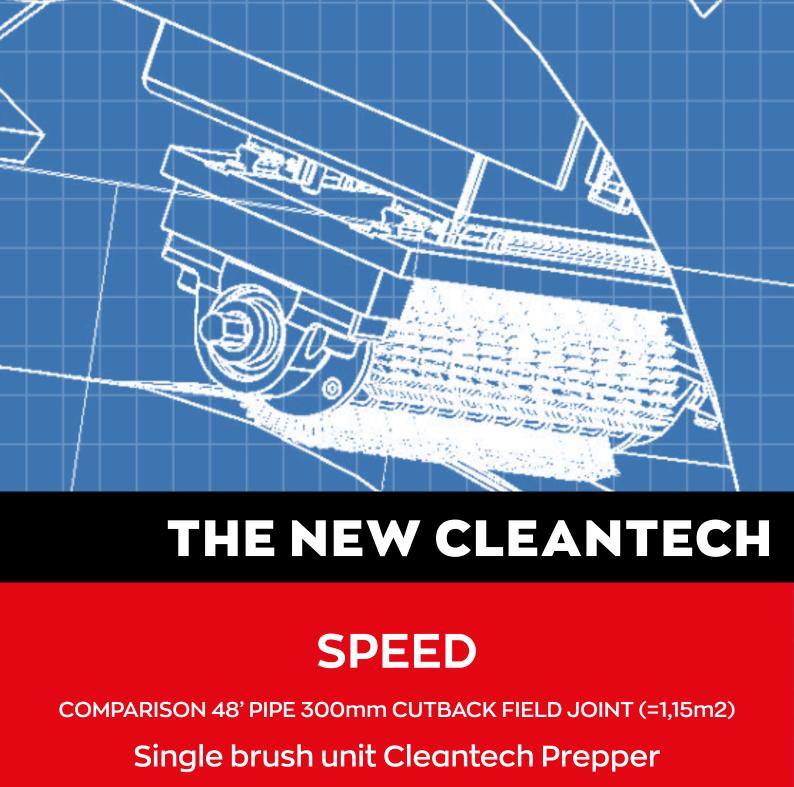


### 127 Seconds

Conventional Blasting 518 seconds



### PREPPER BY MONTI

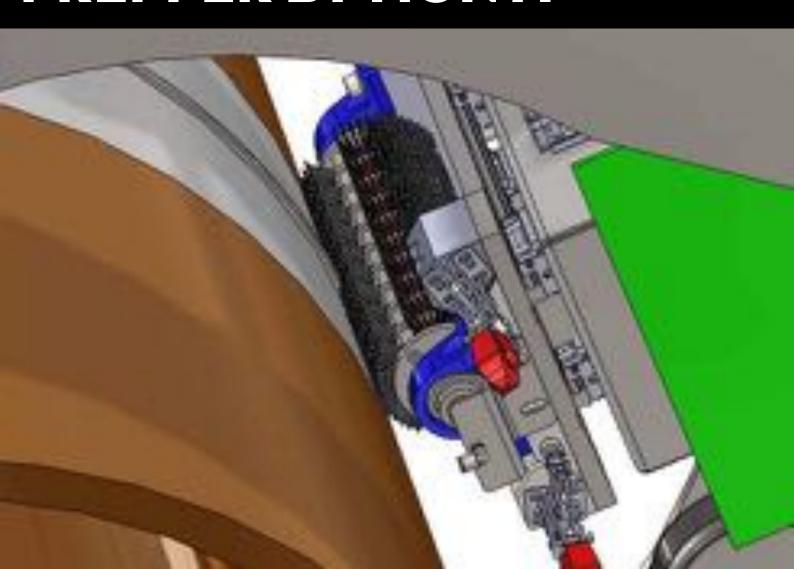








### THE NUMBER 1 CAUSE OF COATING FAILURE IS IMPROPER SURFACE PREPARATION

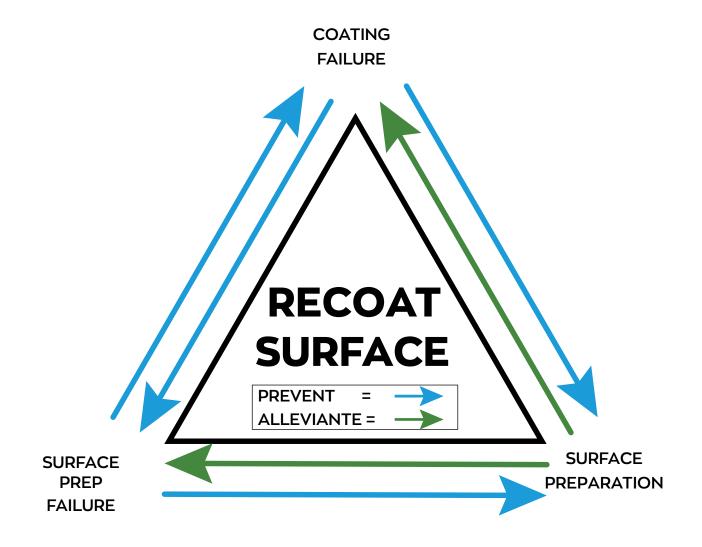

## CLEANTECH PREPPER PREVENTS AND ELIMINATES THE OPPORTUNITY FOR COATING FAILURE



