


▶ THE FUTURE IS NOW



GO-SCAN 3025

Portable Digital Radiography Detector

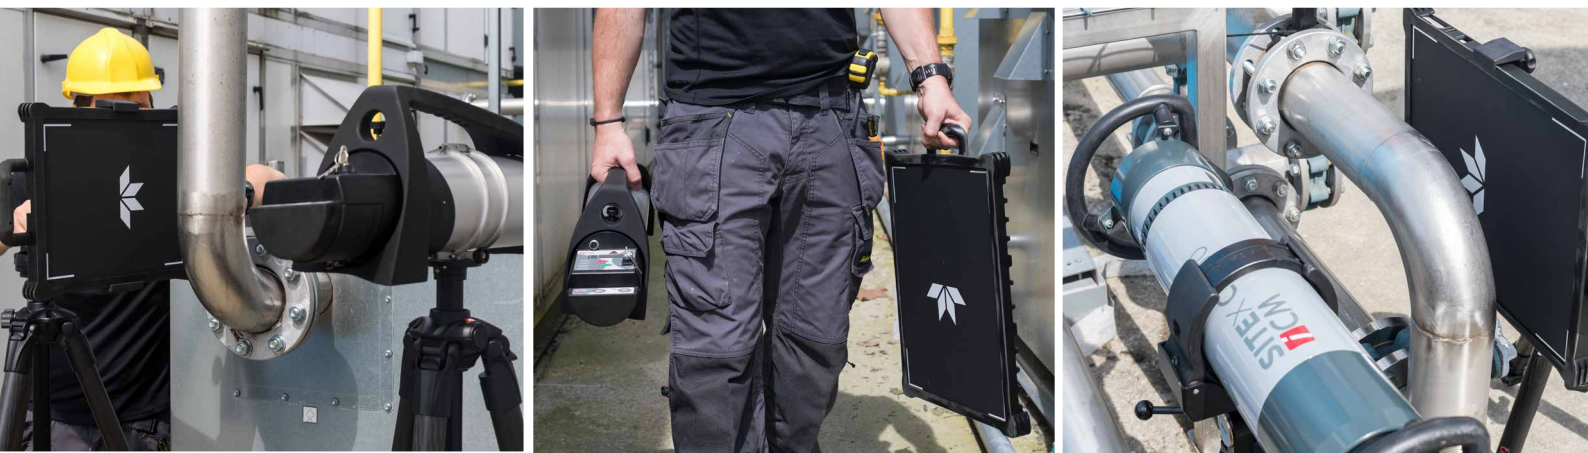

TELEDYNE ICM
Everywhere you look™

Part of the Teledyne Imaging Group

Enter into the new world of digital inspection



BATTERY
OPERATED



IP 67



WIRELESS
OR CABLE




ASI
TECHNOLOGY




PLUG & PLAY



RUGGEDIZED



STATE-OF-
THE-ART
IMAGE EDITING
SOFTWARE



FULLY
INTEGRATED

FEATURES


	Unit	GO-SCAN 3025
GENERAL		
Technology	-	aSi
Pixel pitch	µm	120
Active area	mm/in	300 x 250 / 11.8 x 9.8
Active resolution	pxl	2560 x 2048
BANDWIDTH		
Data interface	-	GigE & Wi-Fi
ADC conversion	bits	16
POWER CONSUMPTION		
Power consumption	W (standing/ operating)	< 8 / 17
INTEGRATION		
Overall dimension	mm/in	339x 287 x 188 / 13.34x 11.29x 7.4
Overall weight (without sleeve)	Kg/lbs	3.5/ 6.6
ENVIRONMENTAL		
Waterproof level	-	IP67
Drop test	m/in	1/39
Operating temperature	°C/°F	-20, 50°C / -4, +122°F
Storage temperature	°C/°F	-20, 60°C / -4, +140°F
Humidity	% R.H.	30 to 75
Life span	Gy/k rem	1000 / 100

SHERLOCK NDT SOFTWARE



Image editing	Smart measurement tool
ADRC dynamic filter	SNR
Local contrast enhancement	Greyscale feature
Teledyne filter	iSRb
Histogram equalization	Annotation / Highlight
Emboss	Mirroring / Rotation
Black & white	Auto IQI
Pseudo-colours	Pixel map edition

DRAWINGS

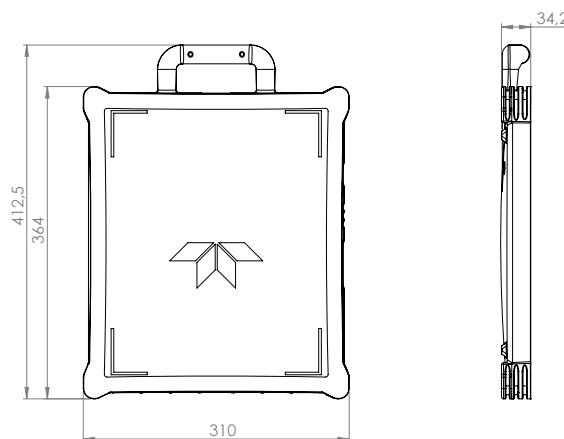

ACCESSORIES



FIXTURING BAR



LATERAL FEET



POWER/COM
CABLE

All specifications are non contractual and subject to change without prior notice.

TELEDYNE ICM

Zoning Les Plennes / Rue Du Progrès 3 / B-4821 Andrimont (Dison) - Belgium
+32 (0)87 44 01 50 / icm.sales@teledyne.com



TELEDYNE ICM
Everywhereyoulook™

Part of the Teledyne Imaging Group